


Submersible Megasonic Array

Go Megasonic in Minutes • Quickly Transform Any Wafer Bath into a Megasonic System

PCT's performance proven Submersible Megasonic Array offers you the advantages of ultraclean wafers with the advanced features of any megasonic unit available today. The Submersible Megasonic Array turns your wafer bath into a megasonic unit simply by placing the unit into the bath. You get state-of-the-art power and control with PCT's computer controlled solid-state amplifier for the megasonic energy source. You can set up the array for remote operation with an audible or visual alarm up to twelve feet from the bath. You can go megasonic quickly.

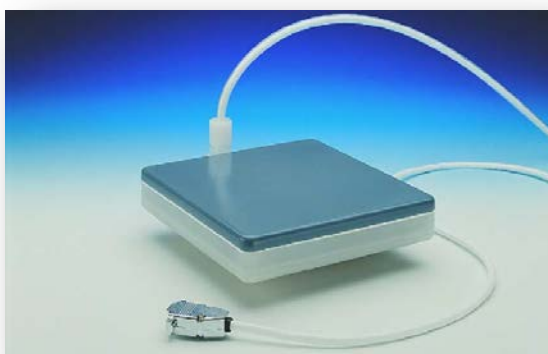

Model 9400 Generator

KEY FEATURES

- Transferable Energy Window (Completely Mobile)
- Frequency Range 450 / 750 / 950 kHz at Resonant Levels
- Standard Window Materials of Teflon Coated Aluminum with PFA Base
- Multiplexed or Full-On Transducers
- Fast Upgradability of Existing Processes (Quick-Dump Rinsers)
- Integrated Control System
- Single & Dual Cassette, Plus Custom Sizes Available

Made in USA

PCT SUB MA 061215

PCT Systems - 49000 Milmont Drive - Fremont, CA 94538
Tel: 510-657-4412 – info@pctsystems.com – www.pctsystems.com





SYSTEM CONFIGURATION

Power Supply / Control System

- CPU
- Dual Multiplexed Solid-State Amplifier With Megasonic Energy Source
- Interlock Inputs For Liquid Level
- RS-232 Interface, SECS-I/II Optional
- Operation / Diagnostics Keypad and LCD Display
- Remote Panel Input

Remote Panel

- Programming Operation Keypad
- Four-Line, Forty Characters Per Line (160 Characters Total) Double-Super-Twisted LCD
- Optional Audible or Visual Alarm
- Twelve Foot Cable for Convenient Location Away from Control System



SPECIFICATIONS

Megasonic Energy

Wattage	Up to 300 Watts per Multiplexed Array (600 Watts for Two Arrays)
Frequency	450, 750 to 950 Khz. Factory Preset for Optimum Processing

Facilities

Power	200 to 220 VAC, 50/60 Hz, Single Phase, 10 Amp Service
Temperature Range	Ambient to 50°C

Materials Of Construction

Energy Window	Teflon Coated Aluminum With PFA Base Is Standard. Optional PVDF Base Is Required for Elevated Temperature up to 50°C Maximum
---------------	---

Warranty

Amplifier	12 Months as Detailed in the Warranty Statement
Submersible Array	6 Months as Detailed in the Warranty Statement

WARRANTY STATEMENT

PCT Systems warrants its products to be free from manufacturing defects in materials and workmanship when used in normal operating conditions for a period of twelve months for electronics and six months for submersible arrays from the date of original shipment from the PCT Systems factory. Damage from improper operation or mishandling is specifically excluded from the warranty. Such mishandling includes, but is not limited to, impact or physically induced breakage, corrosion due to improper operation, negligent use of product, or improper installation or installation techniques.

PCT SUB MA 061215

PCT Systems - 49000 Milmont Drive - Fremont, CA 94538
Tel: 510-657-4412 – info@pctsystems.com – www.pctsystems.com

